

FPS




APPLICATIONS

- Pressure Boosting
- Water Supply & Treatment
- Wash Down
- Water Recirculation
- Irrigation

FEATURES

- 10 pump families covering the most popular hydraulic performance ranges
- Designed for increased efficiency and performance
- Threaded NPT and 125# flanged connection options
- Flow ranges of 50–2000 gpm
- NEMA standard JM and JP shaft motors
1800 and 3600 rpm
ODP and TEFC enclosures available
- Back pull-out design
- Standard carbon/ceramic/nitrile/316 stainless steel mechanical seals or packing-box option
- 416 stainless steel shaft sleeves
- ASTM-A48 CL30 cast iron volute and impellers

AG CENTRIFUGAL PERFORMANCE

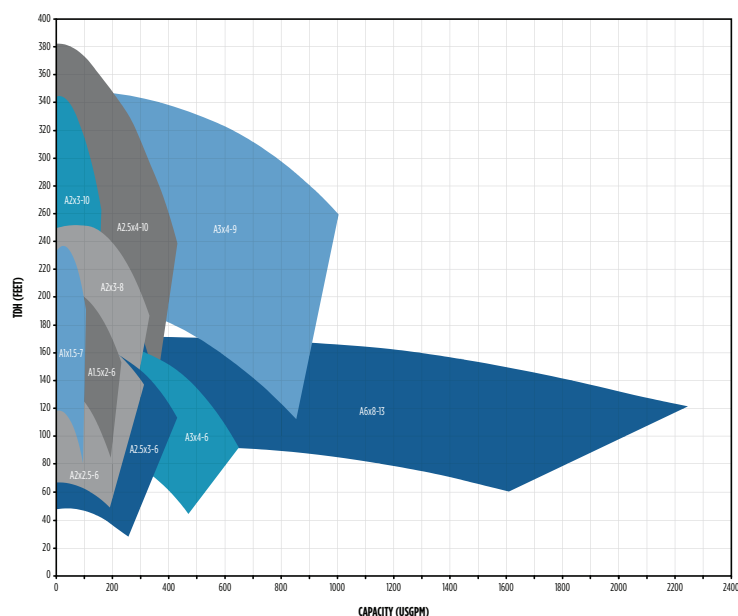

SPECIFICATIONS

- Capacity: 50 to 2000 gpm
- Total Dynamic Head: Up to 300 feet
- Working pressure: Maximum 150 psi
- Liquid Temperature: Up to 212 °F (100° C)

From well-irrigated pastures to watering acres of farmland to meet crop requirements, the AG Series from Franklin can keep your business growing. With 10 of the industry's most popular rating options, standard JM and JP motor frames, and a back pull-out assembly for ease of seal replacement, the AG Series proves to offer improved efficiency and overall performance.