



APPLICATIONS

- Suitable for:
 - Domestic water supply
 - Agricultural irrigation
 - Livestock watering
 - Small-scale commercial use
- Specifically designed for shallow well applications
- Versatile functionality, capable of lifting water from a depth of 25 feet
- Ideal for a wide range of purposes due to its versatile design

FEATURES


- Each model offers superior versatility and can be configured for standard performance, high pressure or high flow
- Impeller with stainless steel insert, diffuser, jet nozzle, and venturi are all molded with Modified PPO
- Heavy-duty cast iron case ensures optimum durability and long life
- Revolutionary "Quick-Change" jet nozzle replacement system allows easy customization of the pump
- Performance can be changed quickly from a high pressure to a high flow set-up without removing the plumbing or opening the case
- Dual voltage motor can be set to run at 115 V or 230 V
- Pressure switch is installed and set at 30/50 PSI
- Built-in drain plug for easy winterizing and servicing
- Handles water temperatures up to 120 °F/49 °C and shut-off pressures up to 90 psi
- 1" NPT discharge, 1-1/4" NPT suction

SPECIFICATIONS

- Discharge: 1"
- Suction: 1.25"
- HP Range: All

Model	HP	Volts
FVJ05CI	1/2 HP	115 VAC / 230 VAC
FVJ07CI	3/4 HP	115 VAC / 230 VAC
FVJ1CI	1 HP	115 VAC / 230 VAC
FVJ15CI	1.5 HP	115 VAC / 230 VAC

1/2 and 3/4 HP

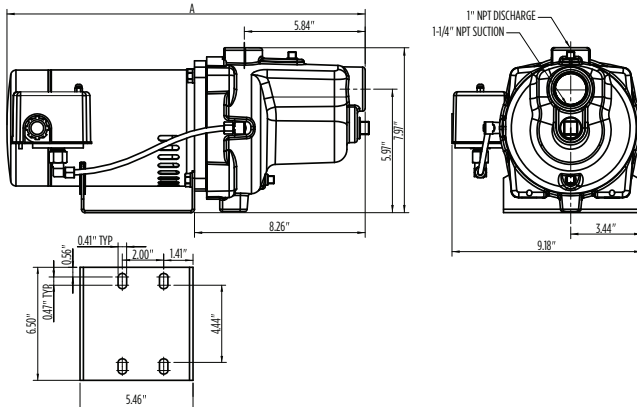

1 and 1.5 HP

