



APPLICATIONS

- Irrigation
- Dewatering

FEATURES

- Wide range of flows and pressures
- Compact design
- Robust cast-iron construction
- Mounting bracket allows for versatile mounting options
- Oil lubricated gearbox
- Corrosion resistant powder coat finish
- Mounted on a wheeled cart


OPTIONS

- Priming Pump
- Suction and Discharge fittings

PERFORMANCE


Model	RPM	264 GPM		396 GPM		528 GPM		660 GPM		793 GPM		925 GPM	
		HP	PSI	HP	PSI	HP	PSI	HP	PSI	HP	PSI	HP	PSI
TNO80	3400	29	110	35.5	107	43	99	47	87				
	3600	32	124	41.5	121	49.5	114	54	102				
	3800	39	136	47.5	134	55	128	62	117				
TNO125	3000					71	155	84	148	99.5	142	110	132
	3200					86	176	100	170	111	165	125	156
	3400					96	196	114	193	129	188	142	178

DIMENSIONS

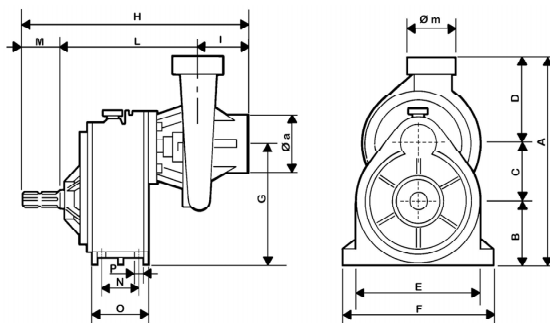

TNO 80

Ø a	Ø m	A	B	C	D	E	F	G
4"	3"	480mm	136mm	126mm	214mm	300mm	320mm	266mm
H	I	L	M	N	O	P	Weight	
485mm	95mm	310mm	85mm	75mm	117mm	14mm	58 kg	

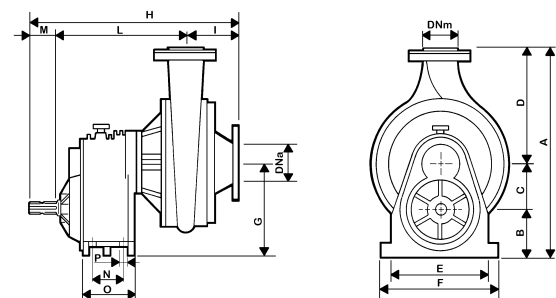


TNO 125

DN a	DN m	A	B	C	D	E	F	G
105mm	95mm	520mm	145mm	125mm	250mm	310mm	335mm	270mm
H	I	L	M	N	O	P	Weight	
555mm	121mm	356mm	80mm	95mm	140mm	16mm	95kg	

Performance Chart 

TNO PERFORMANCE CURVES

TNO 80

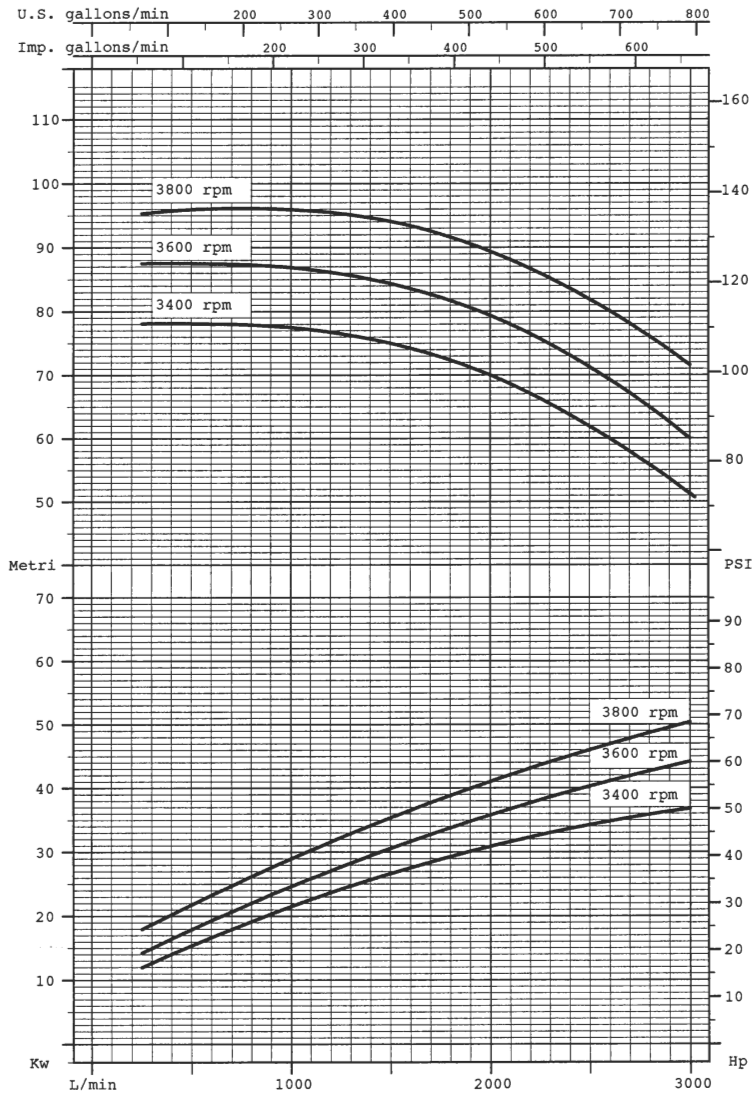

TNO 125

