



**SOUTHERN
IRRIGATION**

QUICK5 STANDARD CHAMBER



APPLICATIONS

The Quick5® Standard Chamber fits in a 36" wide trench and is ideal for curved or straight systems. The chamber's five-foot length provides optimal installation flexibility.

BENEFITS

- Advanced contouring connections swivel up to 10°, right or left
- Latching mechanism allows for quick installation
- Less chambers needed for faster installation
- Supports wheel loads of 16,000 lbs/axle with 12" of cover
- Certified by the International Association of Plumbing and Mechanical Officials (IAPMO)

SPECIFICATIONS

- Size: 34"W x 65"L x 12"H (864 mm x 1651 mm x 305 mm)
- Effective Length: 60" (1524 mm)
- Louver Height: 8" (203 mm)
- Storage Capacity: 56.5 gal (215 L)
- Invert Height: 8" (203 mm)



[Specifications](#) 





**SOUTHERN
IRRIGATION**




QUICK5 STANDARD CHAMBER



QUICK5 STANDARD CHAMBER

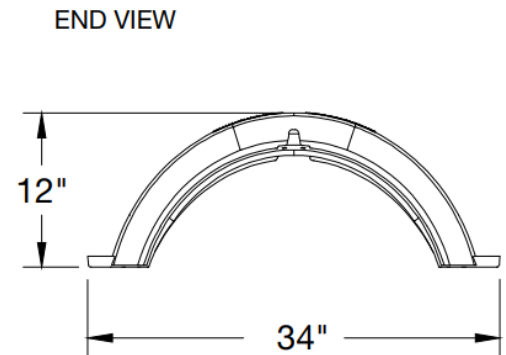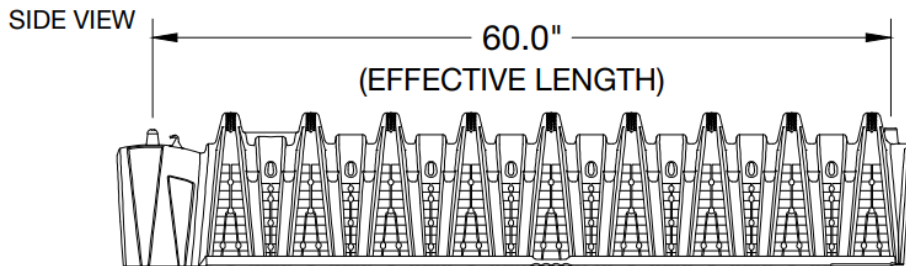

MULTIPORT ENDCAP

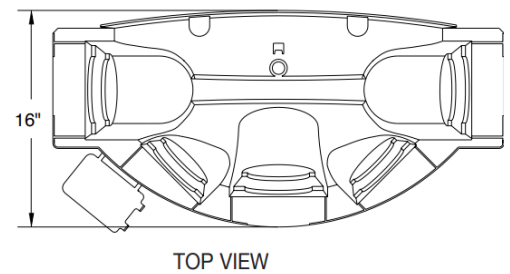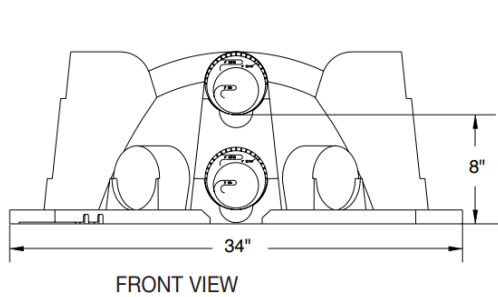

TYPICAL TRENCH VIEW

